

UPRIGHT REACH-IN REFRIGERATOR

Top Mounted Condensing Unit

ES – Series Model : ESWR2



Operating temperature range is 33°F ~ 54°F



Please visit our website for updated Energy Efficiency information

Shelving

- Three epoxy coated wire shelves per section
- Stainless steel pilasters and shelf clips

Cabinet Construction

Heavy duty stainless steel interior and exterior, with galvanized steel finished top, bottom and back wall of exterior. ABS evaporator drain cover. 2.5" thick high density foamed-in-place polyurethane insulation. Four 4" diameter casters (front casters with brakes). Door heater installed around inside cabinet frame to prevent moisture build-up.

Refrigeration System

- Self-contained condensing unit located at top of cabinet for high performance
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- Forced-air cooling with multiple evaporator fan motors providing balanced airflow throughout cabinet to ensure faster temperature drop
- Environmentally friendly CFC free R-134A refrigerant
- Adjustable, time initiated defrost cycle of 3 to 12 hours with 350 watt defrost heater, both time and temperature terminated for fail-safe operation
- Automatic evaporator fan motor delay after defrost cycle
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Exterior anodized aluminum drain pan for self sufficient condensation removal
- Pressure relief ports for rapid cabinet re-entry
- Interior airflow backguard to ensure proper air circulation
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

Doors

- Heavy duty stainless steel interior and exterior
- 2.5" thick high density foamed-in-place polyurethane insulation
- Rounded corners for a sleek and modern appearance
- Heavy duty adjustable torsion spring self-closing door system
- One piece snap-in magnetic door gaskets for easy replacement
- Heavy duty recessed door handles for a flat surface
- Door locks
- Field reversible doors

Lighting

- Shielded incandescent interior lighting

Temperature Control

- Factory preset temperature, 35°F
- Temperature setting range from 33°F to 54°F
- Easy to read digital temperature display
- Easy to program push button temperature control
- Microchip digital control and monitoring system with a variety of functions to monitor and maintain optimum temperature

Model	# of Doors	Capacity (Cu. Ft.)	HP	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight	Exterior Dimensions		
									L	D	H*
ESWR2	2	55	1/3	R-134A	6	115-60-1	5.25	444lbs (201.4kg)	59" (1500 mm)	31 5/8" (803 mm)	74 1/4" (1885 mm)

* : Height does not include 5" for casters.

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity (P) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

UPRIGHT REACH-IN REFRIGERATOR

Top Mounted Condensing Unit

ES – Series Model : ESWR2



DIMENSIONAL DATA		
Net capacity cu. ft.	55 (1557.4 cu l)	
Exterior (mm)	Length Overall in.	59" (1500)
	Depth Overall in.	31 5/8" (803)
	Height Overall in.*	74 1/4" (1885)
Crated Weight	444lbs (201.4kg)	
# of Doors	2	
# of Shelves	6	
Shelf Size Length x Depth in. (mm)	26 3/16" x 24" (665 x 610)	
ELECTRICAL DATA		
Voltage (V-Hz-Ph)	115-60-1	
Full load amperes	5.25	
Feed wires with Ground	3	
Cord Length ft.	9	
REFRIGERATION DATA		
Refrigerant	R-134A	
Compressor H.P.	1/3 HP	
BTU/HR† (Kcal/h)	2555(644)	




Equipped with one NEMA 5-15P plug.

Specifications subject to change without notice.

* : Height does not include 5" for casters.


† : Based on evaporating temperature of 23°F(-5°C) & Condensing temperature of 131°F(55°C).

Dimensions (mm)

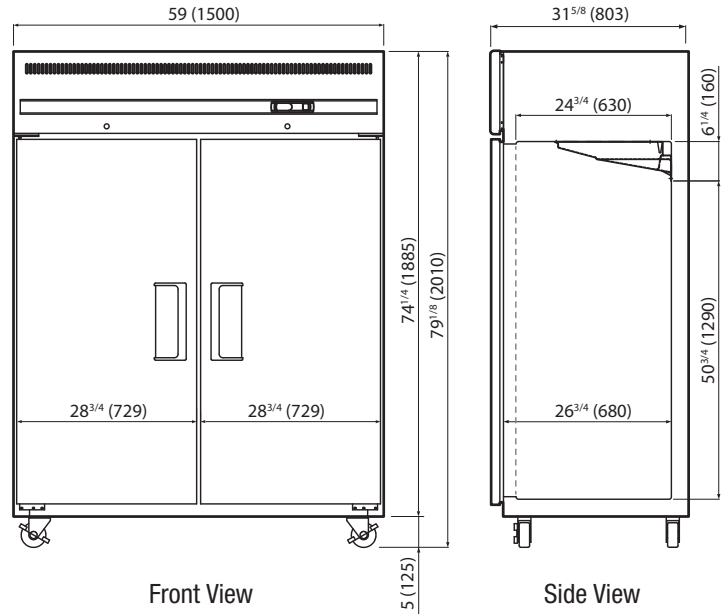

Front View

Side View

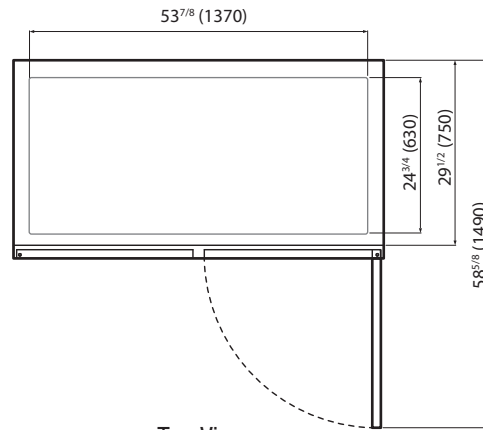

Top View